



SELECT SERIES™

BY  TRU AUDIO






SELECT SERIES™

S63

- (2) 6.5" extreme high excursion mid bass drivers
- (3) 1" tweeters in a triple array
- Patented MMAG Motor Technology (US 6,917,690), licensed from STEP Technologies
- Bi-wire
- 300w EIA RS-436-B
- Impedance: 8Ω
- Sensitivity: 87 dB (2.83V / 1M)
- -3 dB point 58 Hz
- Maximum continuous output is 111 dB with 300 watts RMS (at 1 meter / half space)

S63i IN-WALL LCR

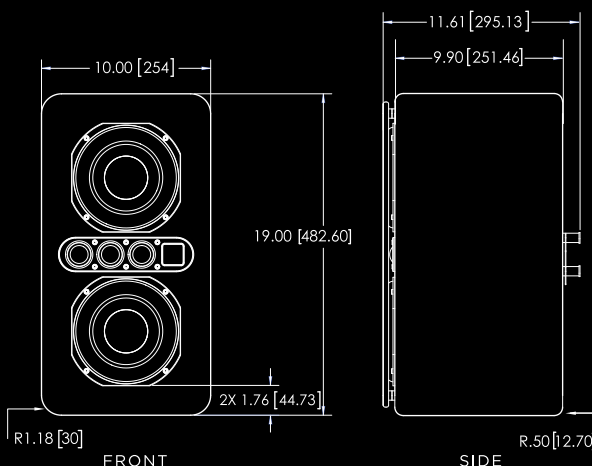

W12

- Axially aligned opposing 12" drivers to create total force cancellation, allowing maximum output
- Massive 3" diameter voice coil & motor assembly
- Multi-radius rubber surround for extended 3" peak-to-peak cone travel
- F3 of 22Hz
- Maximum continuous output of 115dB
- XLR and RCA inputs
- Power output: 700 Watt
- Voltage: 100-240VAC 50/60 Hz

